

Figure 1

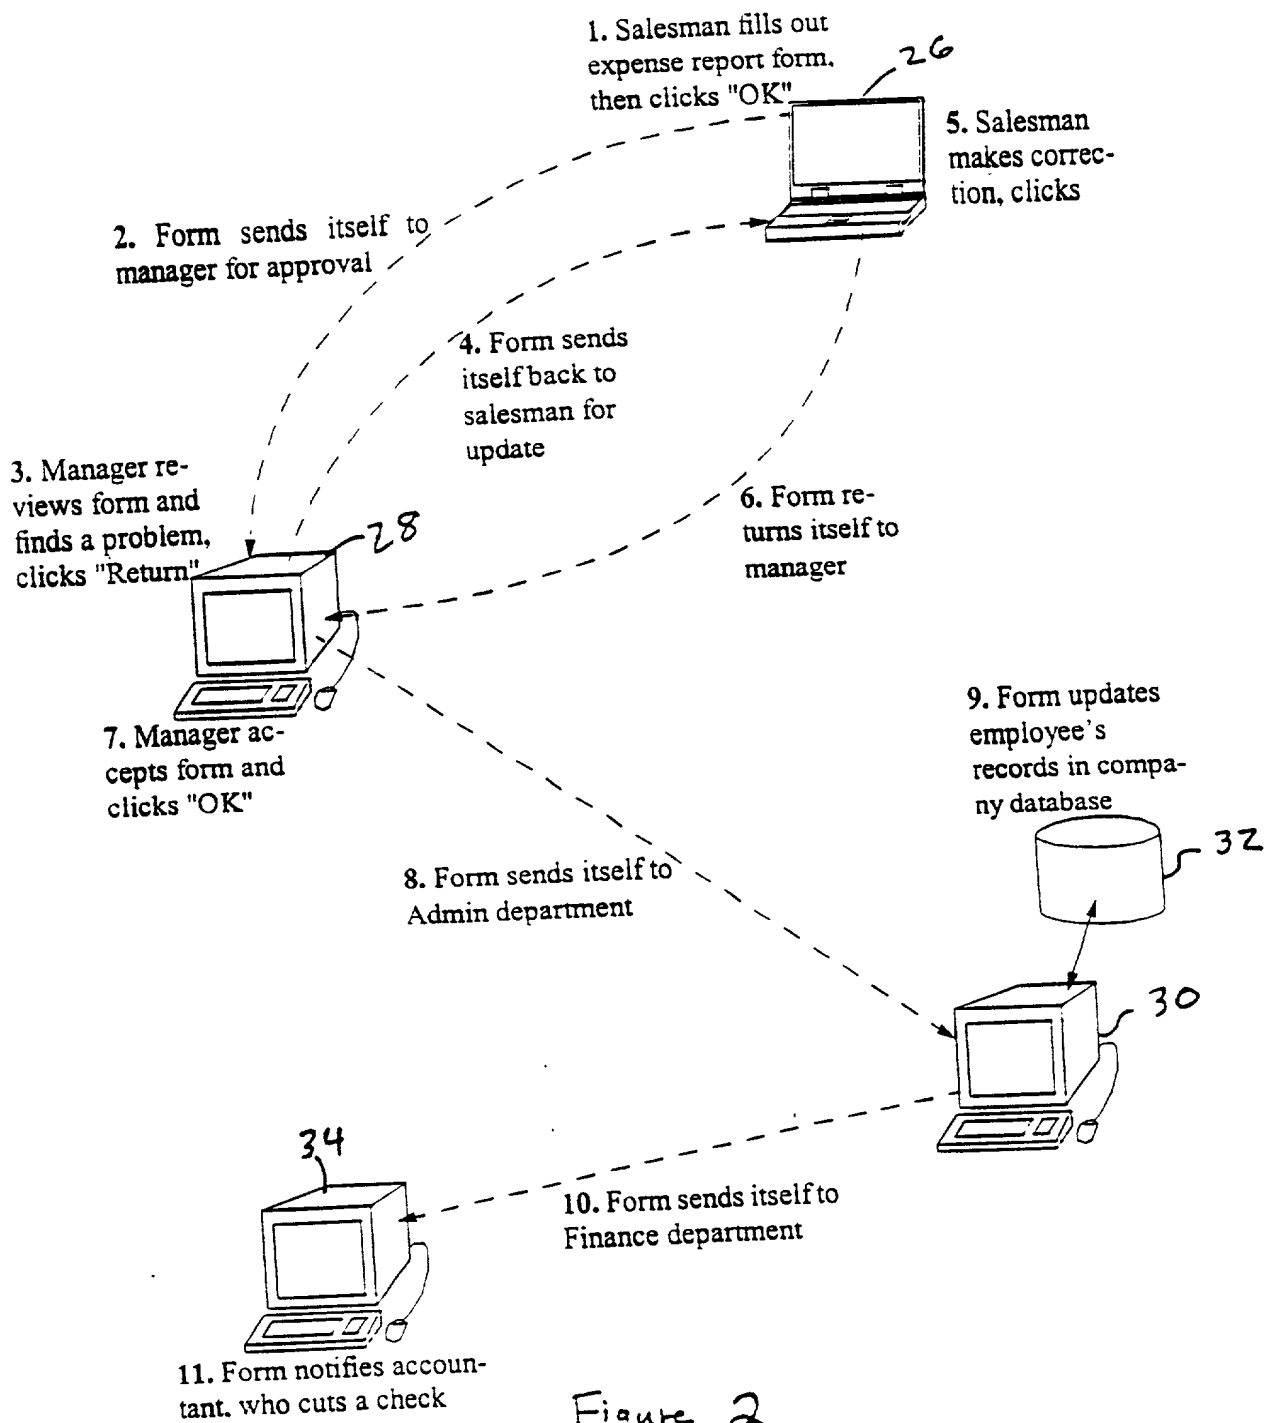


Figure 2

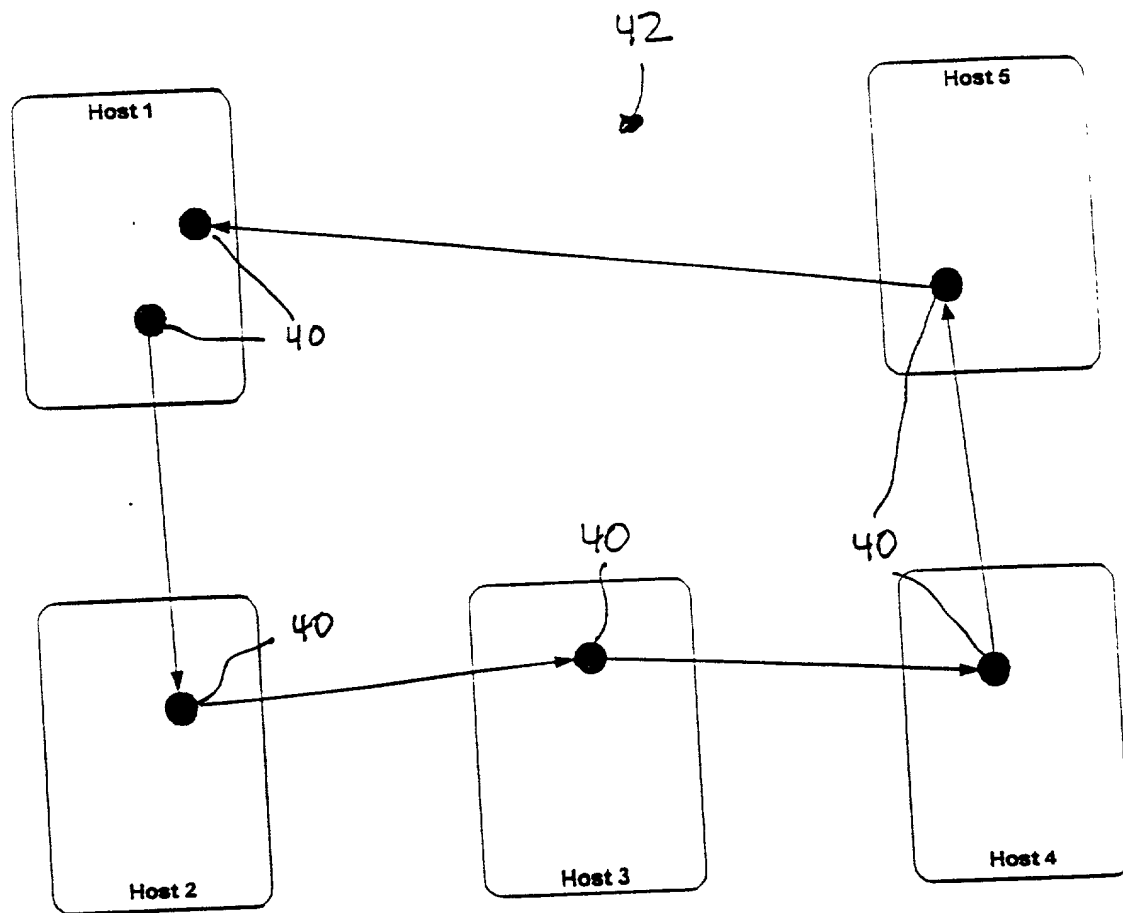


Figure 3

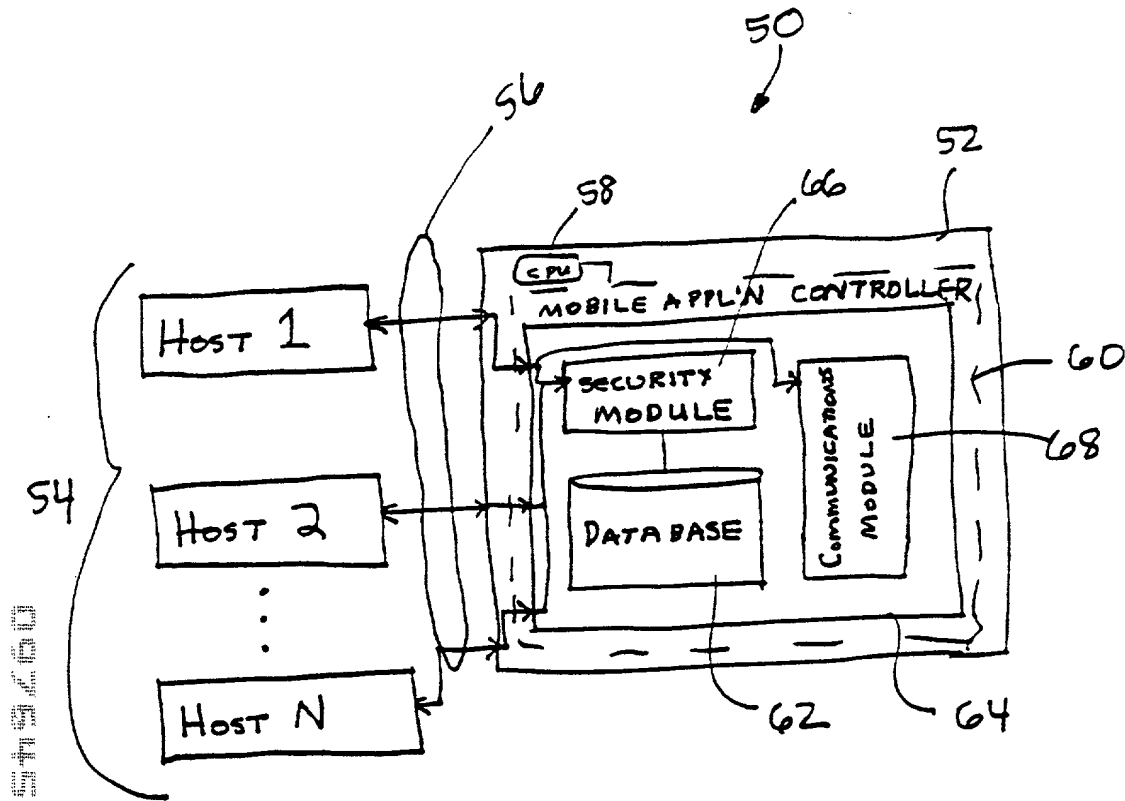


FIGURE 4

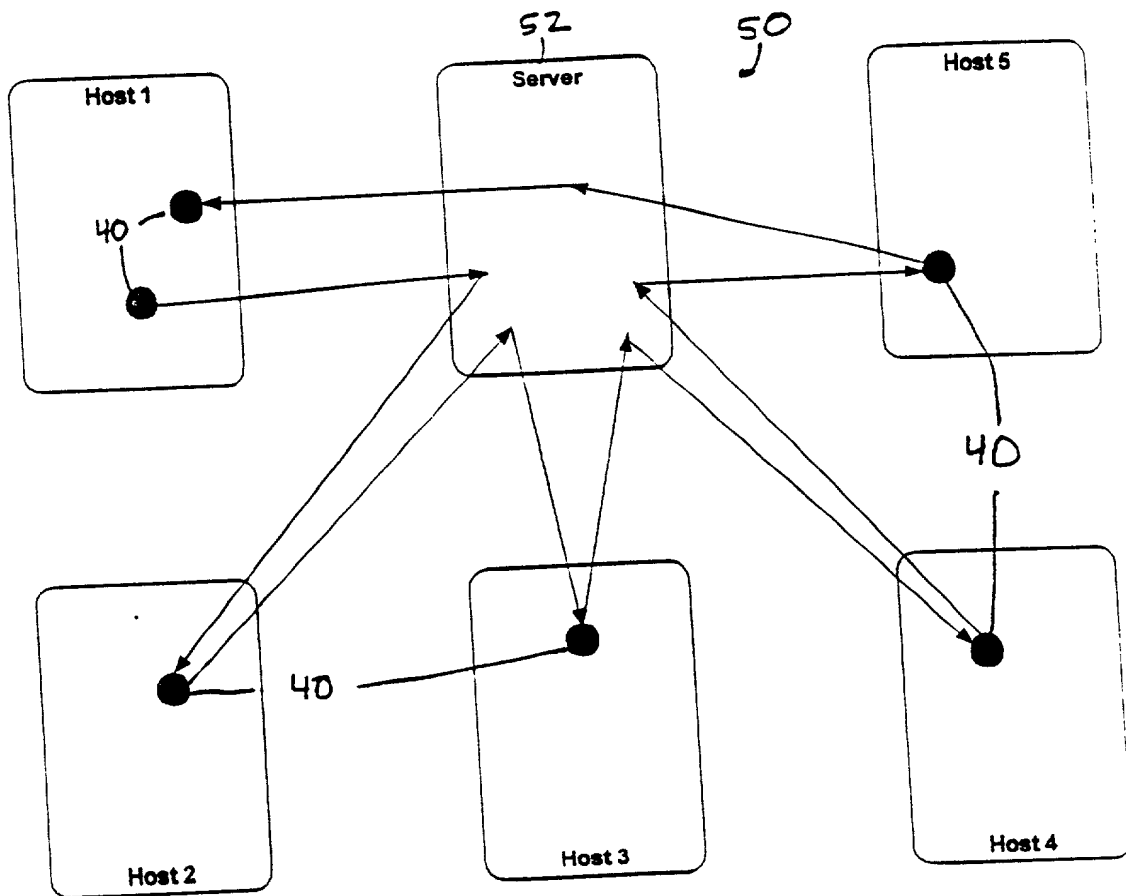


Figure 5

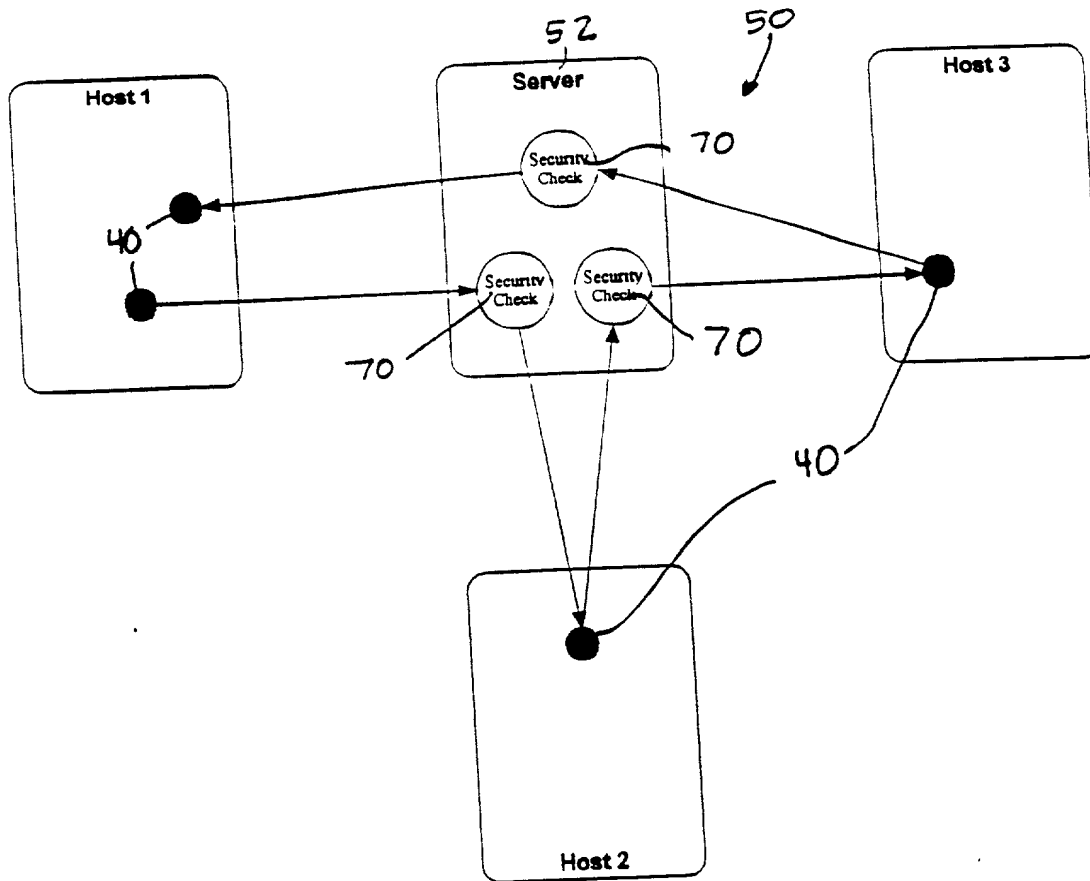


Figure 6

62

Server inspects its pre-installed software for missing code. If it is found, it is returned to the current host.

e. If originating host is not trusted by server, server inspects its own software.

d. If originating host is trusted by server, server sends request to originating host for missing code.

If originating host returns the missing code, the code is sent to current host.

If originating host does not return the missing code, the server inspects its own software

Server receives request for missing code.

If code is located, it is sent to the current host.

If code is not located, message is sent to current host

c. Send request to server for required code.

f. If server returns missing code, missing code is added to mobile applications's internal datastore

a. Inspect mobile application's internal datastore

b. Inspect local host's pre-installed code.

Current Host

Originating host inspects its own pre-installed software. If the needed code is located, it is returned to the server.

Originating Host

Figure 7

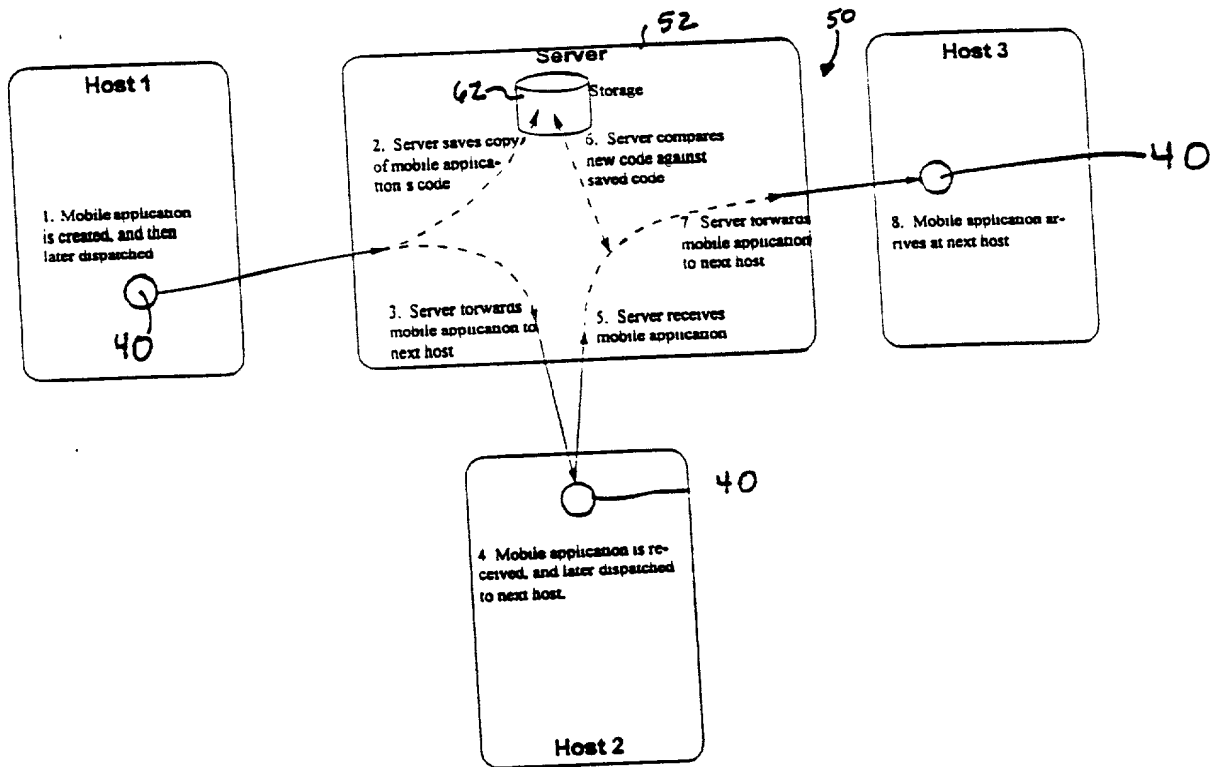


Figure 7a



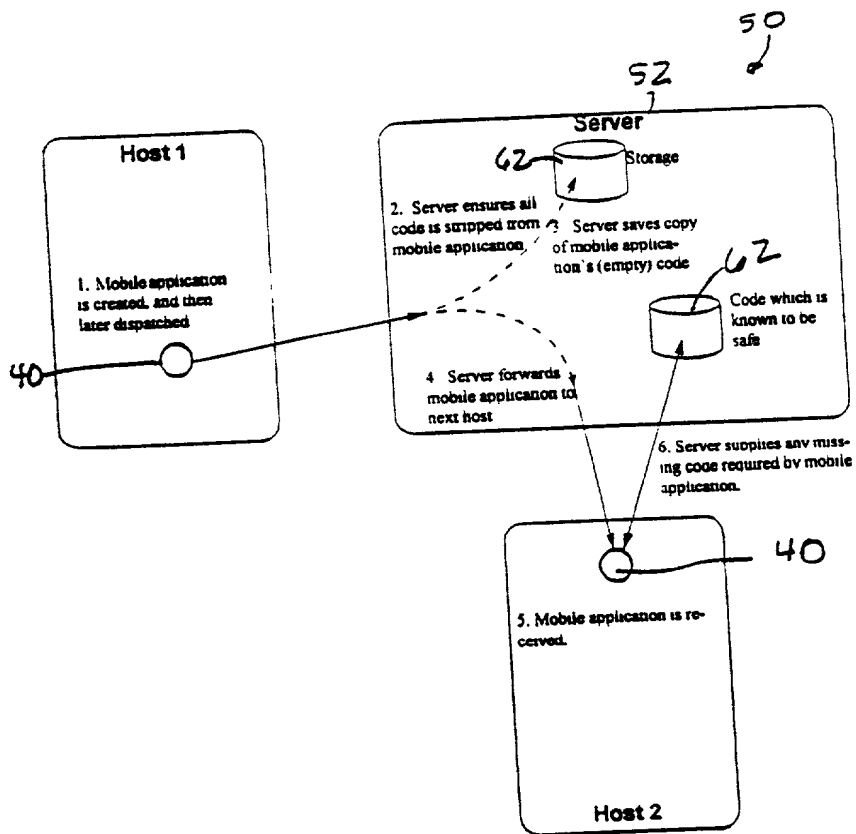


Figure 8

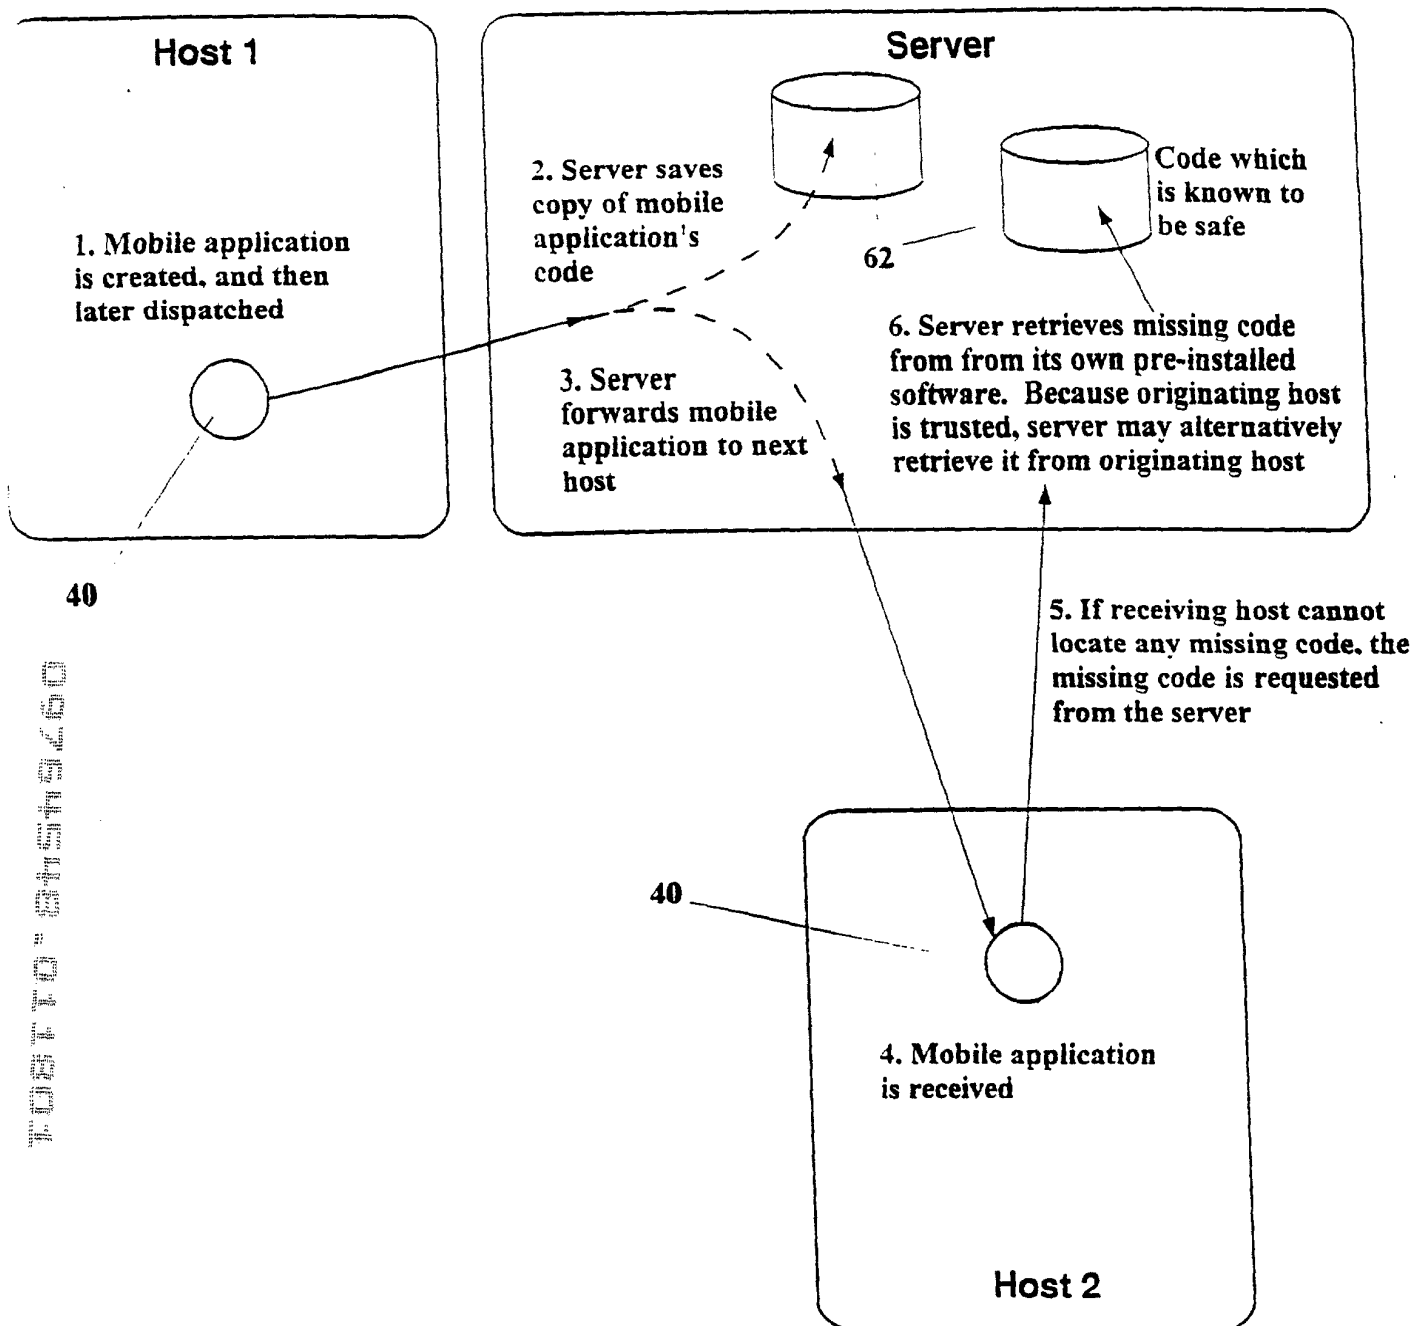


Figure 9

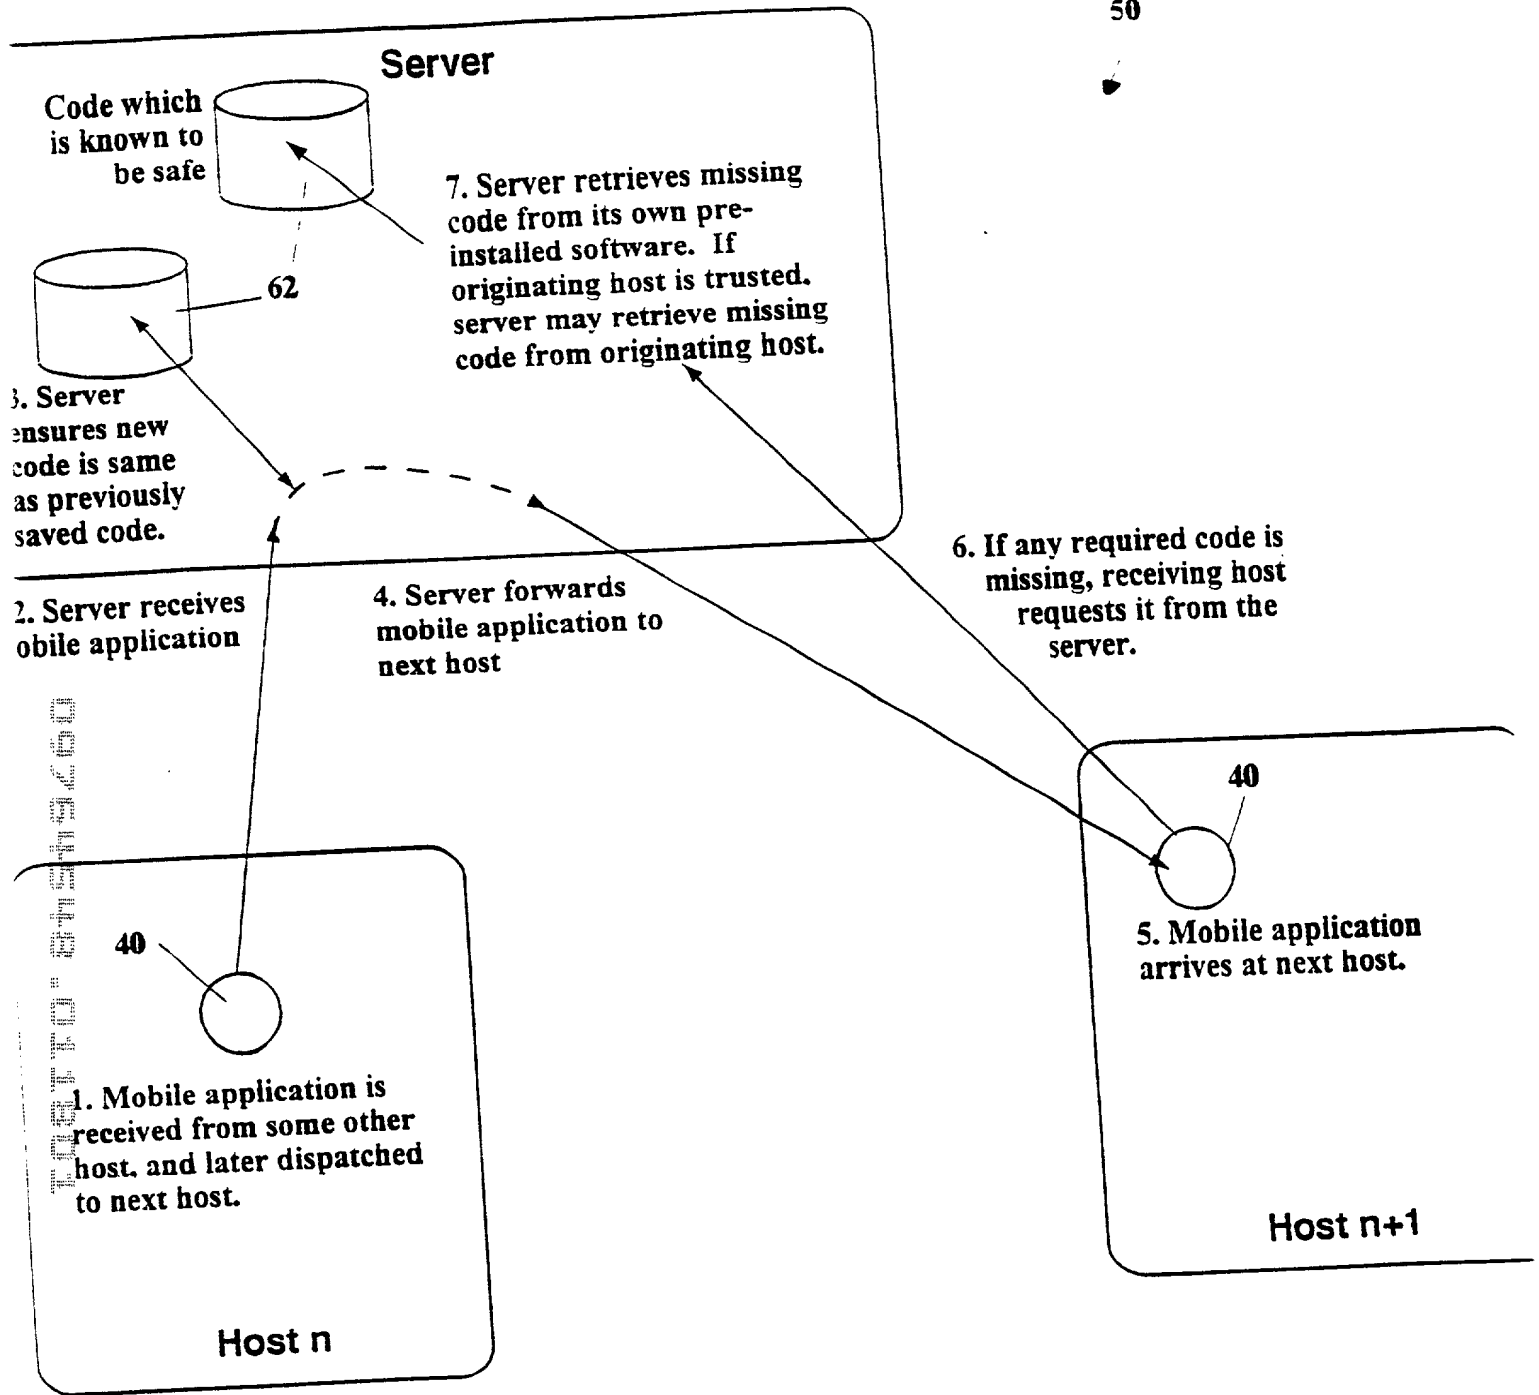


Figure 10

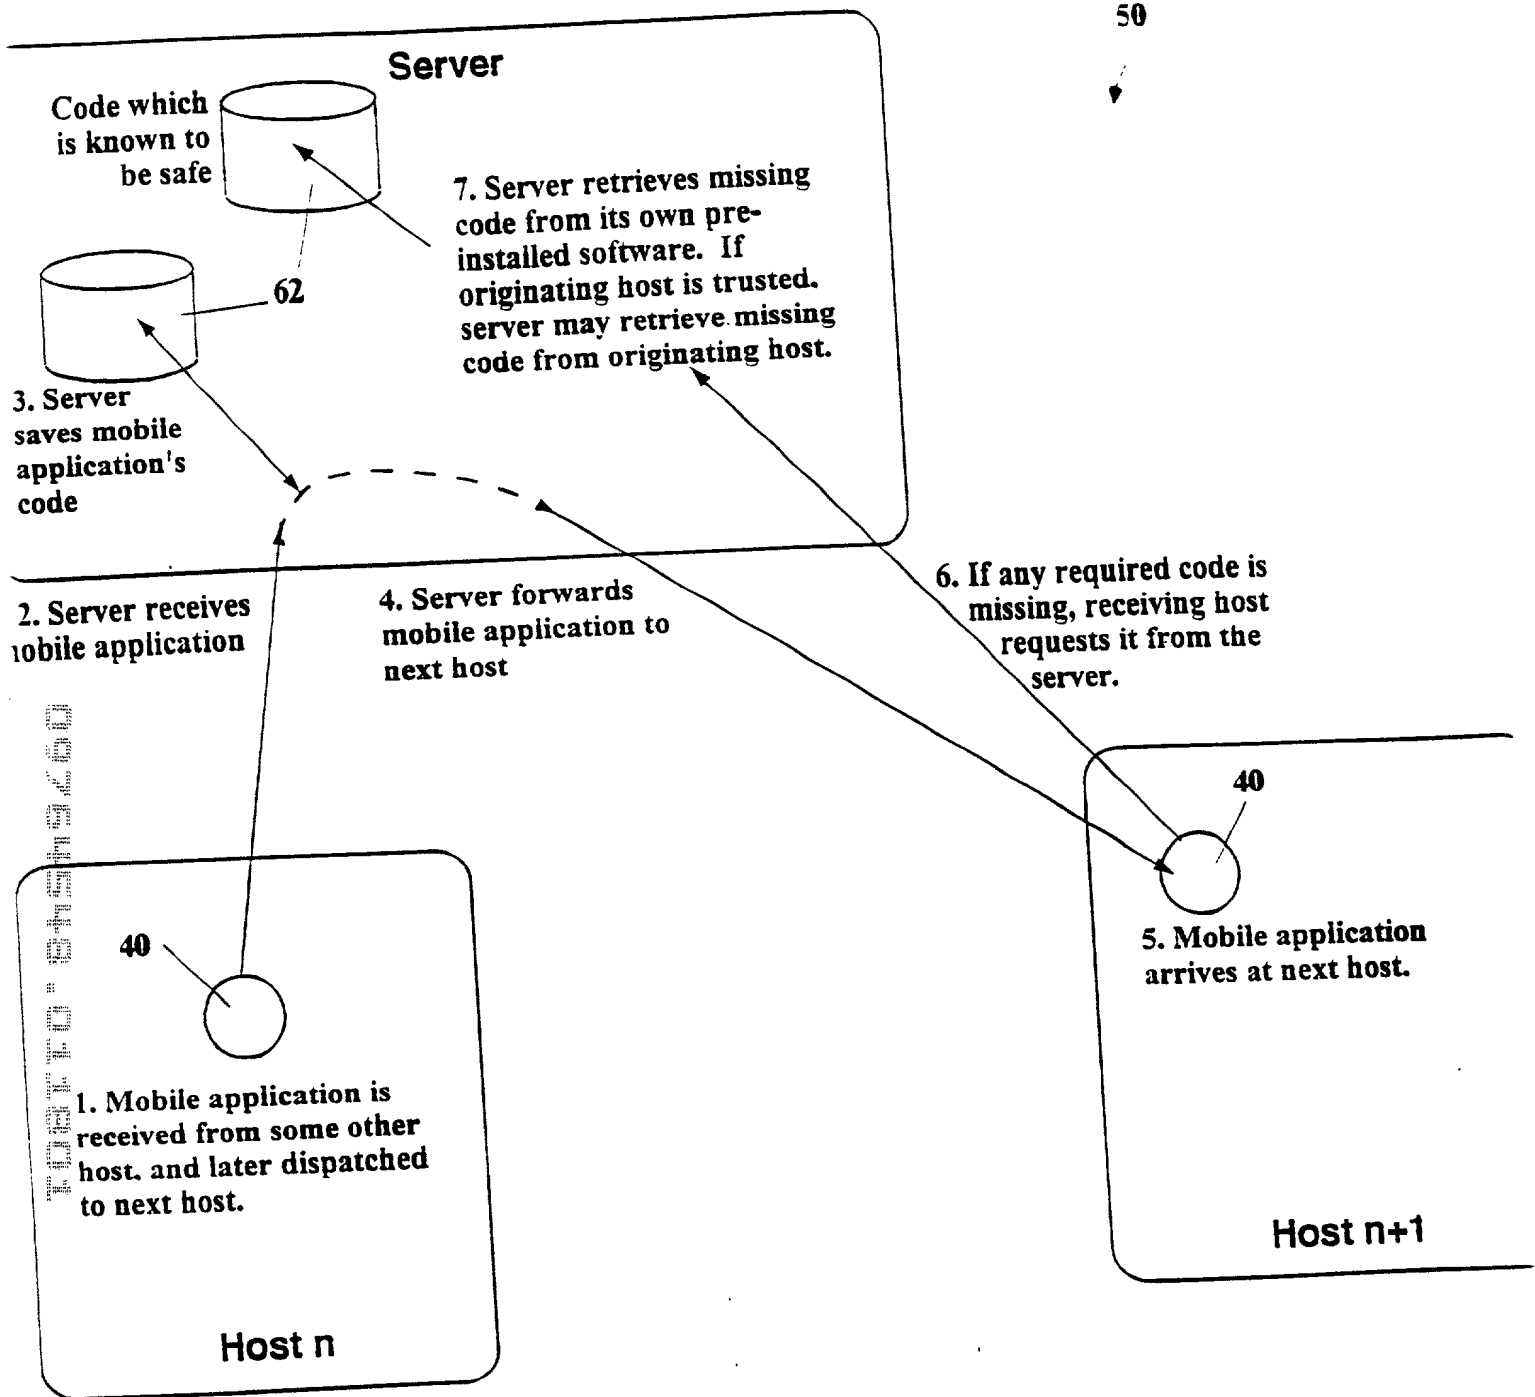


Figure 11

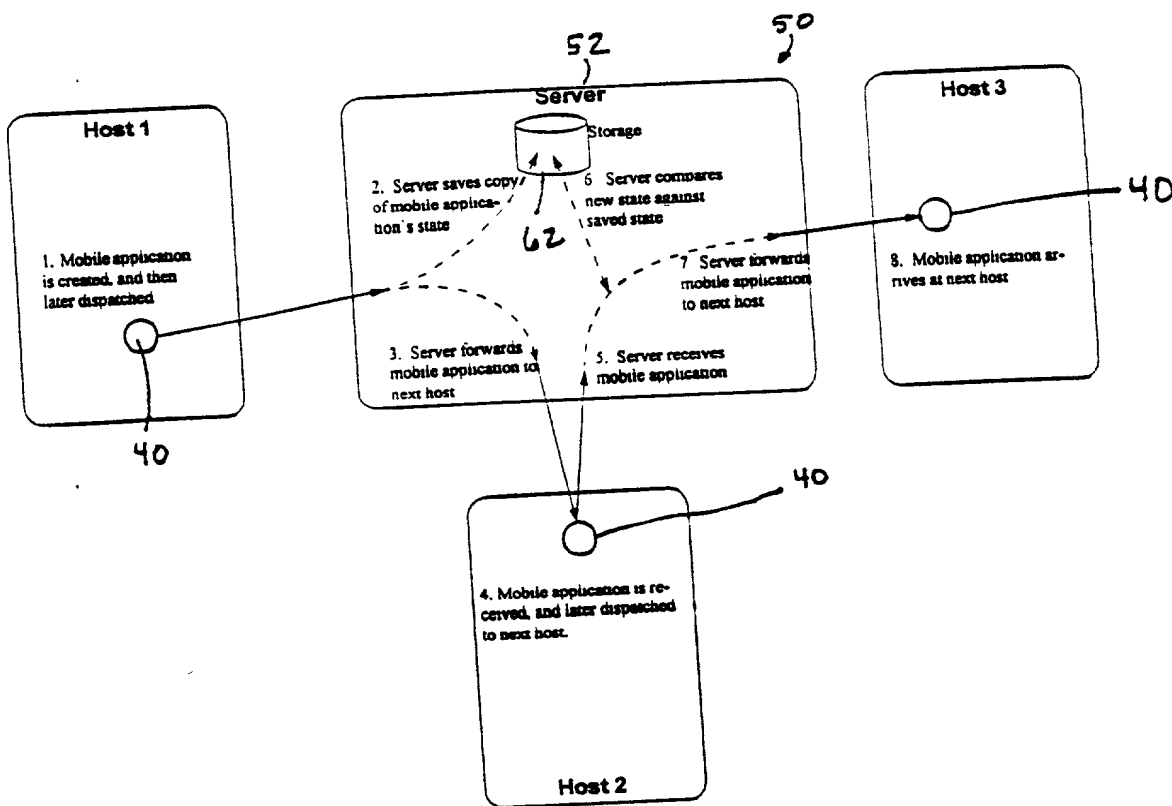


Figure 12

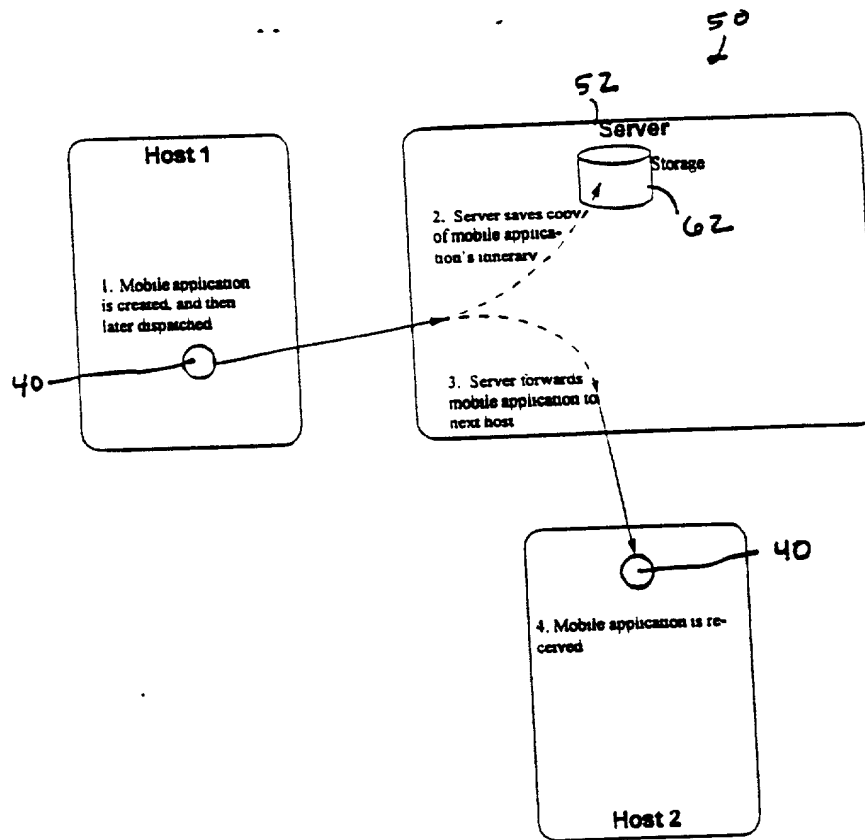


Figure 13

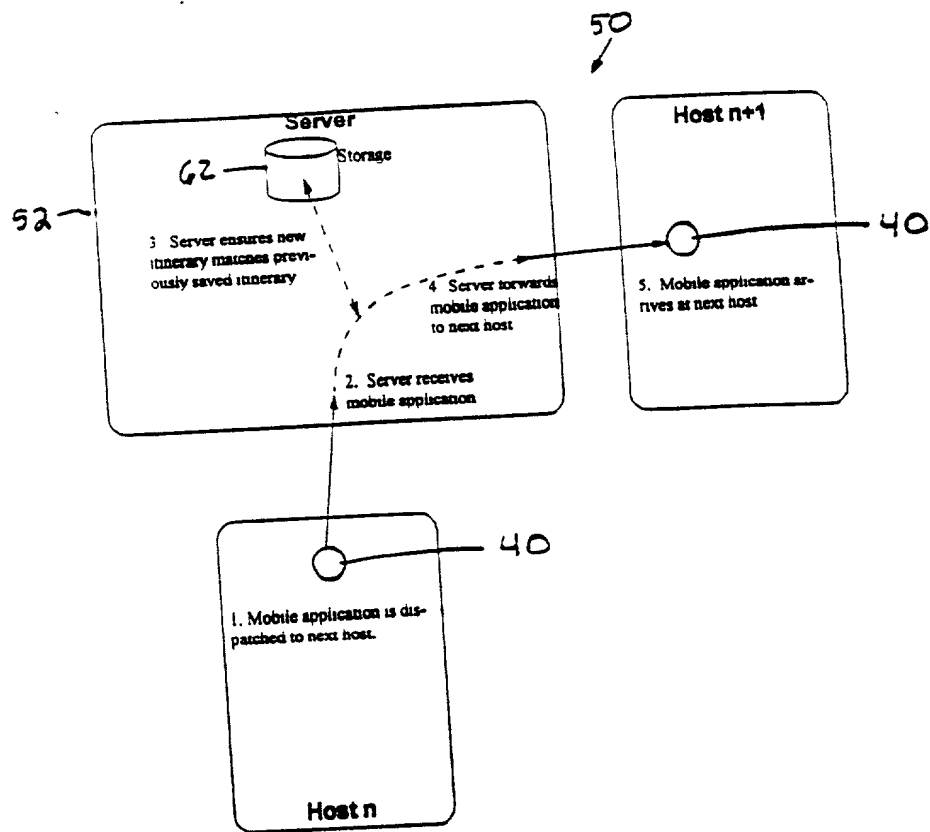


Figure 14

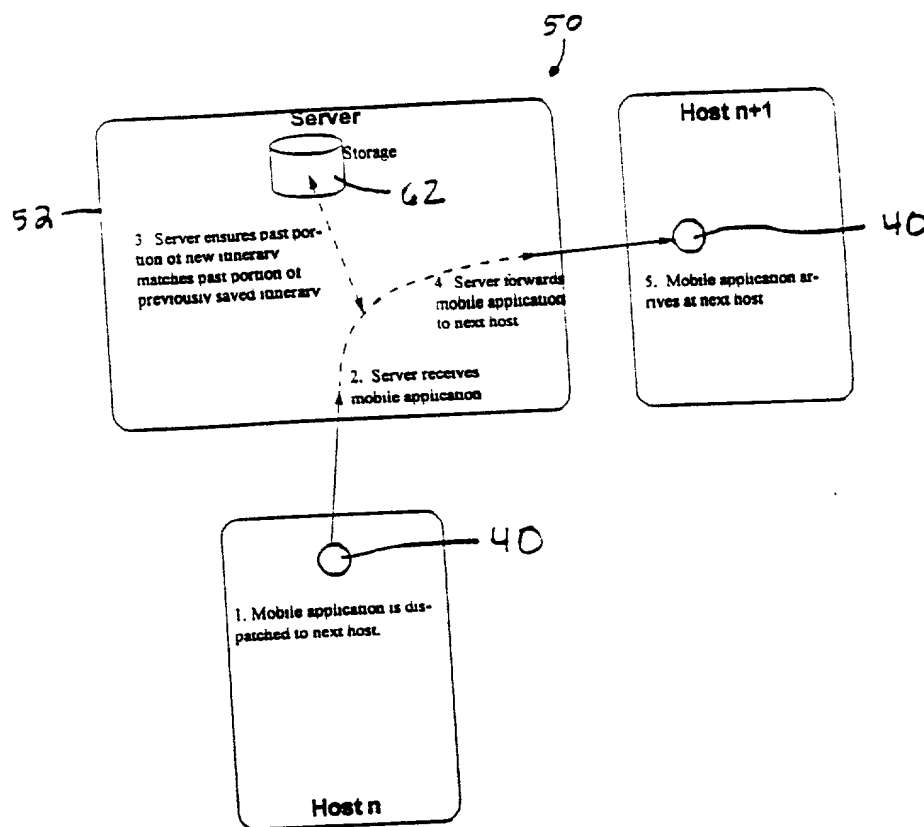


Figure 15



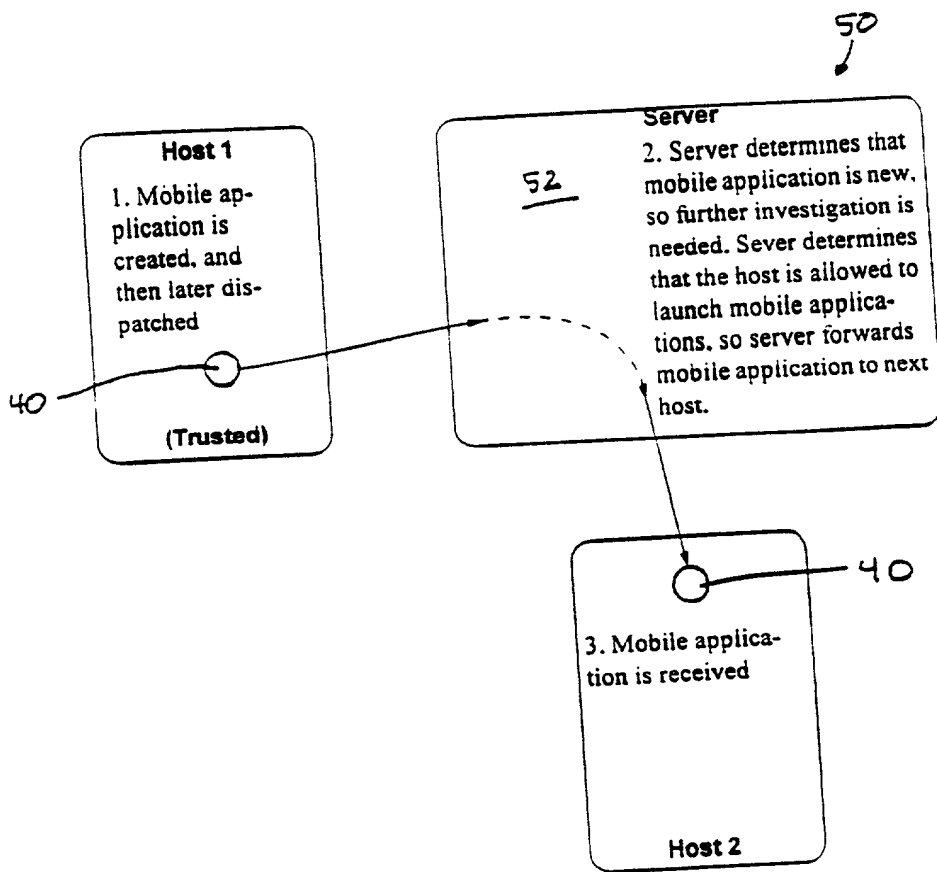


Figure 16

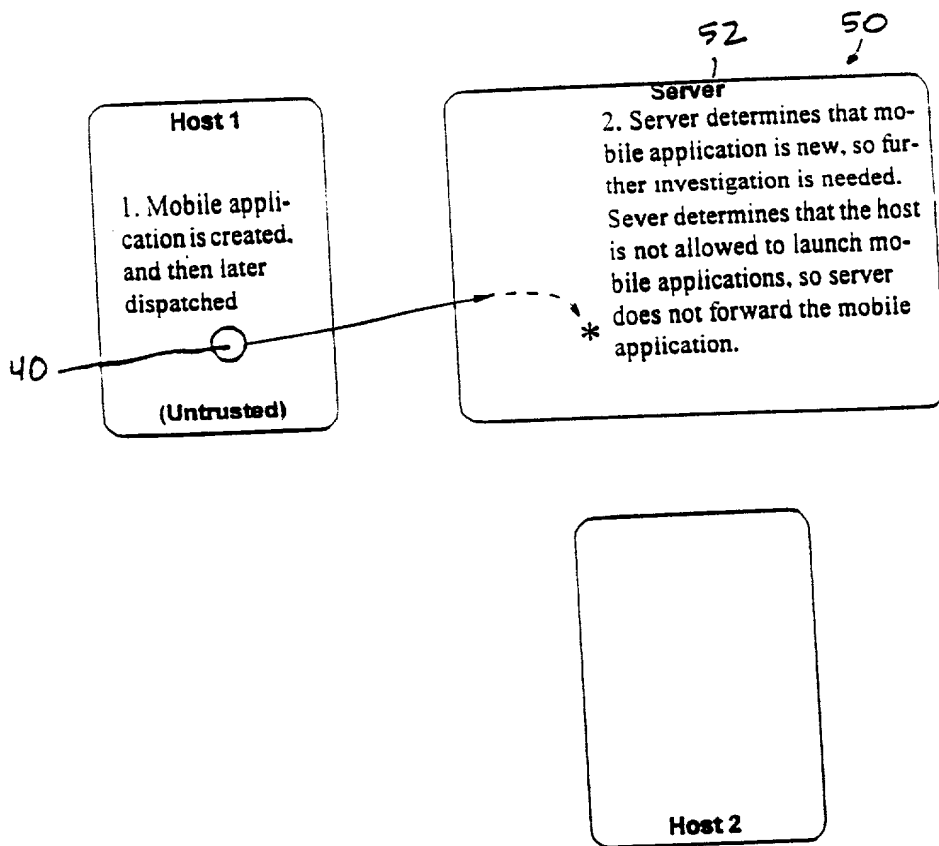


Figure 17

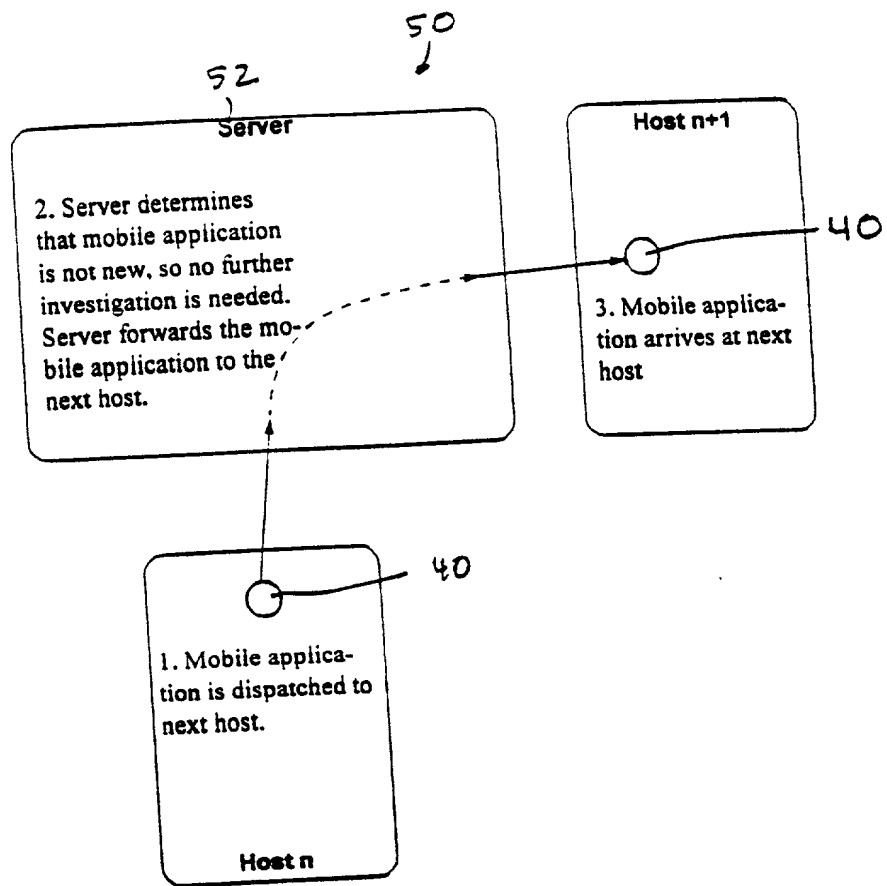


Figure 18